



AA Ni-Cd 1.2V 700mAh


Application :		High Current Application			Dimensions with Tube (mm) :
Nominal Voltage :		1.2V			
		Discharge rate			
		0.2C	1C	5C	
Capacity	Minimum :	700mAh	680mAh	650mAh	
	Typical :	780mAh	770mAh	700mAh	
Weight :		≤ 23g			
Impedance at 1000Hz :		≤ 25mΩ			
Charge	Standard :	70mA (0.1C) during 16h			
	Fast :	700mA (1C) during 1.2h			
Discharge Current	Standard :	70mA (0.1C)			
	Maximum Continuous:	3.5A (5C)			
	Pulse Discharge (3s) :	7A (10C)			
Temperature	During Storage :	-20°C to +45°C			
	During Standard Charge :	0°C to +45°C			
	During Fast Charge :	+10°C to +40°C			
	During Discharge :	-20°C to +65°C			

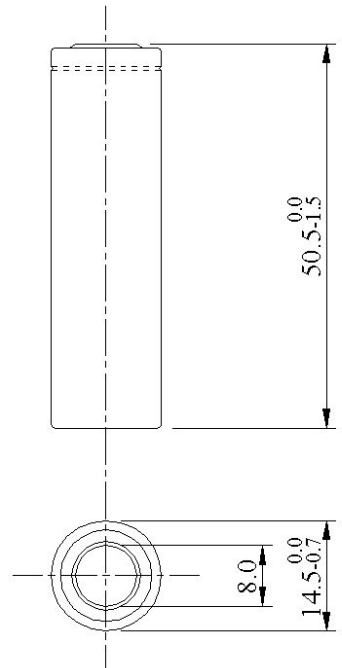


Standard Charge Characteristics

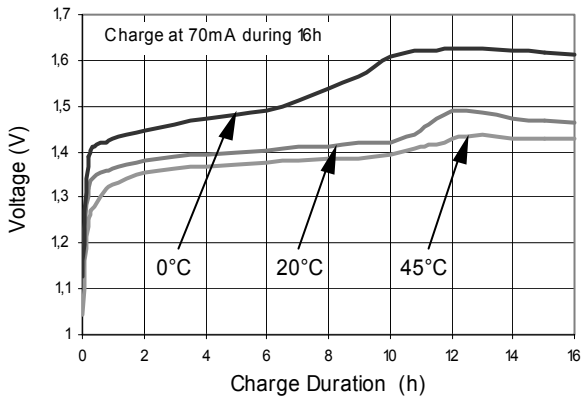

Fast Charge Characteristics

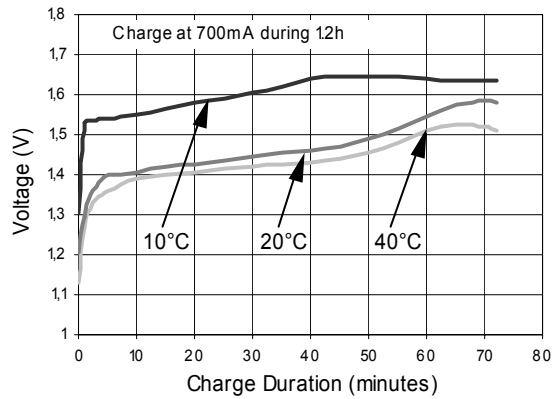

Discharge Characteristics

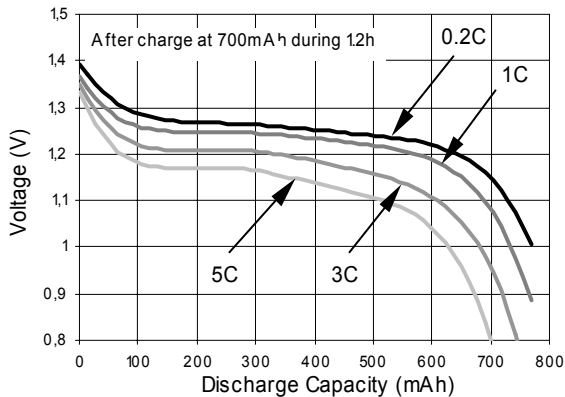

Available Capacity

