


## C Ni-Cd 1.2V 2500mAh

Application :		<b>High Temperature Application</b>	Dimensions with Tube (mm) : 
Nominal Voltage :		1.2V	
Capacity	@0.2C @ 20°C :	2500mAh	
	@0.5C @ 0°C :	2250mAh	
	@0.5C @ 20°C :	2500mAh	
	@0.5C @ 40°C :	2700mAh	
	@0.5C @ 55°C :	2250mAh	
Weight :		≤ 71g	
Impedance at 1000Hz :		≤ 10mΩ	
Charge	Standard :	250mA (0.1C) during 16h	
	Maximum :	1250mA (0.5C) during 2.5h	
	Permanent :	125mA (0.05C) during 48h	
Discharge Current	Standard :	1250mA (0.5C)	
	Maximum continuous :	7.5A (3C)	
Temperature	During Storage :	-20°C to +45°C	
	During Standard Charge :	0°C to +70°C	
	During Permanent Charge :	0°C to +55°C	
	During Discharge :	-20°C to +70°C	

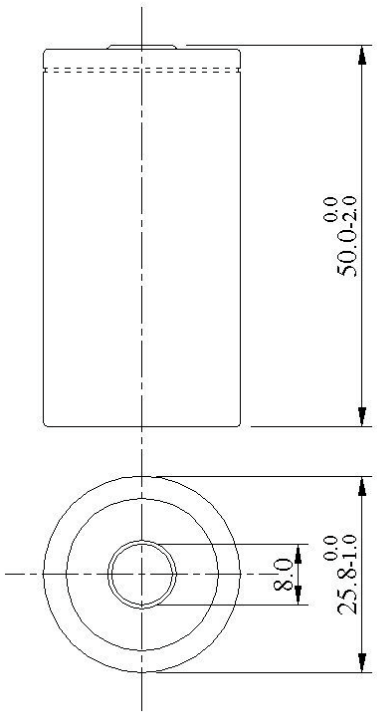