



SC Ni-Cd 1.2V 2100mAh

Application :		High Current Application			Dimensions with Tube (mm) :
Nominal Voltage :		1.2V			
		Discharge rate			
		0.2C	1C	5C	
Capacity	Minimum :	2100mAh	1890mAh	1680mAh	
	Typical :	2310mAh	2100mAh	1890mAh	
Weight :		≤ 50g			
Impedance at 1000Hz :		≤ 10mΩ			
Charge	Standard :	210mA (0.1C) during 16h			
	Fast :	2100mA (1C) during 1.2h			
Discharge Current	Standard :	210mA (0.1C)			
	Maximum Continuous:	10.5A (5C)			
	Pulse Discharge (3s) :	21A (10C)			
Temperature	During Storage :	-20°C to +45°C			
	During Standard Charge :	0°C to +45°C			
	During Fast Charge :	+10°C to +40°C			
	During Discharge :	-20°C to +65°C			


Standard Charge Characteristics

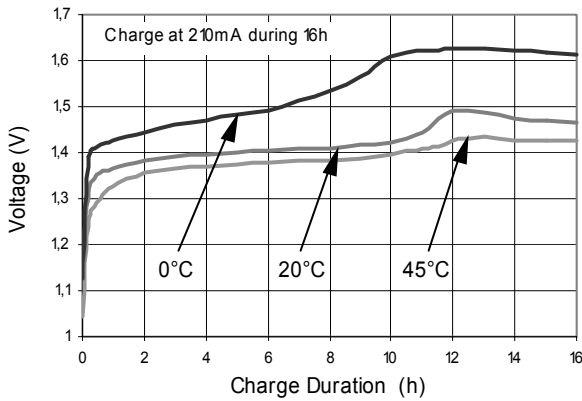

Fast Charge Characteristics

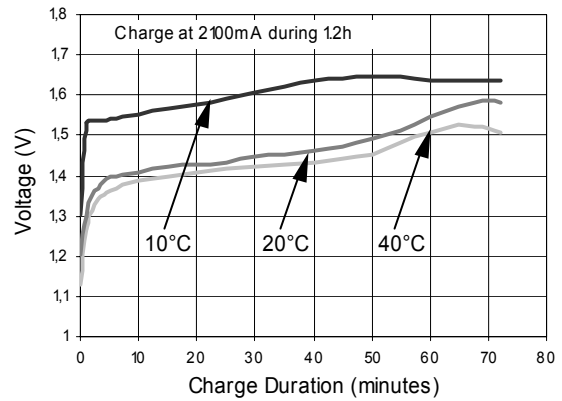

Discharge Characteristics

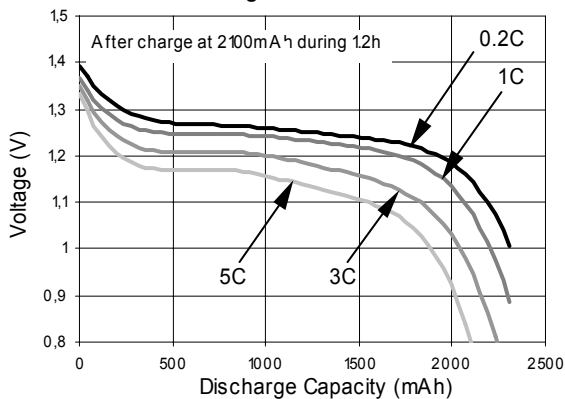

Available Capacity

