

PRODUCT IMAGE / IMAGE DU PRODUIT



GENERAL SPECIFICATIONS / SPECIFICATION GÉNÉRALES

| | |
|---|-----------------------------------|
| Technology / Technologie | Lithium/Manganese Dioxide |
| Designation IEC / Désignation IEC | 2CR5 |
| Nominal Capacity / Capacité Nominale | 1300 mAh |
| Nominal voltage / Tension nominale | 6.0V |
| Maximum Discharge Current / Courant de décharge maximum | Constant: 2000mA Pulse: 3000mA |
| Discharge Cut-off Voltage | 3V |
| Average weight (g) / Poids moyen (g) | 43g |
| Shelf Life / Durée de vie | 10 years / 10 ans |
| Dimension / Dimension (mm) | 34 x 17 x 45 |

TEMPERATURE RANGE / PLAGE DE TEMPÉRATURE


| | |
|---|----------------|
| Operating temperature range / Température d'utilisation | -40°C to +60°C |
| Storage Temperature Range / Température de stockage | 5°C to +30°C |

RECOMMENDED APPLICATIONS / APPLICATIONS RECOMMANDÉES


Digital cameras,
Toys
GPS trackers
Remote controllers

Caméras digitales
Jouets
Trackers GPS
Télécommandes

DISCHARGE CHARACTERISTICS / CARACTÉRISTIQUES DE DÉCHARGE

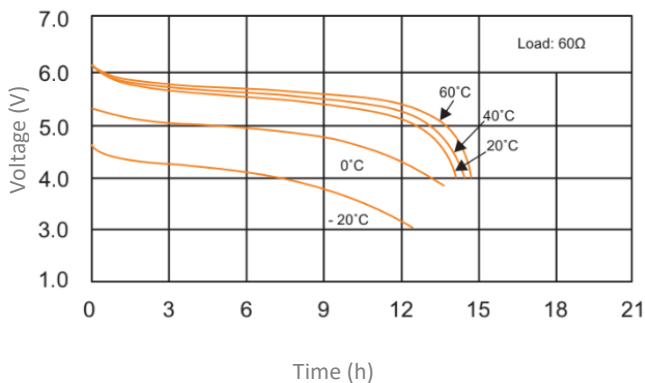

NOMINAL DIMENSION / DIMENSION NOMINALE (mm)

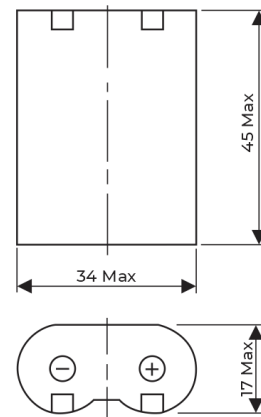

*The above information is generally descriptive only and is not intended as guarantee or warranty
**Uniross reserves the right to alter or amend the design, model and specification without prior notice.