

PRODUCT IMAGE / IMAGE DU PRODUIT



GENERAL SPECIFICATIONS / SPECIFICATION GÉNÉRALES

Technology / Technologie	Lithium/Manganese Dioxide
Designation IEC / Désignation IEC	CR2
Nominal Capacity / Capacité Nominale	800 mAh
Nominal voltage / Tension nominal	3.0V
Maximum Discharge Current / Courant de décharge maximum	Constant: 1000mA Pulse: 2000mA
Discharge Cut-off Voltage	2V
Average weight (g) / Poids moyen (g)	12.5g
Shelf Life / Durée de vie	10 years / 10 ans
Dimension / Dimension (mm)	Φ 15.3 x 26.5

TEMPERATURE RANGE / PLAGE DE TEMPÉRATURE


Operating temperature range / Température d'utilisation	-40°C to +60°C
Storage Temperature Range / Température de stockage	5°C to +30°C

RECOMMENDED APPLICATIONS / APPLICATIONS RECOMMANDÉES


Digital cameras
Clocks
Flashlights
Toys
GPS trackers
Remote controllers

Caméras digitales
Horloges
Lampes de poche
Jouets
Trackers GPS
Télécommandes

DISCHARGE CHARACTERISTICS / CARACTÉRISTIQUES DE DÉCHARGE

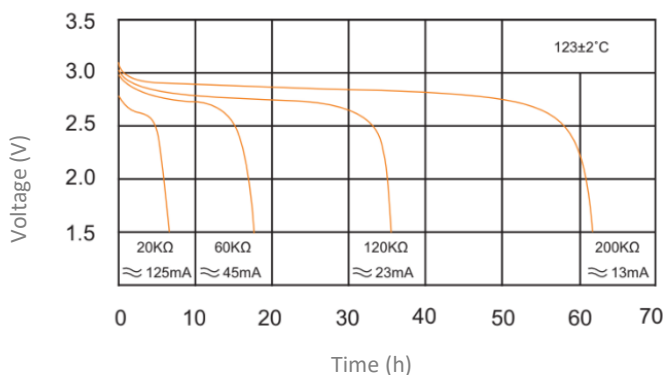

NOMINAL DIMENSION / DIMENSION NOMINALE (mm)

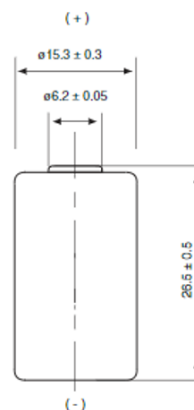

*The above information is generally descriptive only and is not intended as guarantee or warranty
**Uniross reserves the right to alter or amend the design, model and specification without prior notice.