

PRODUCT IMAGE / IMAGE DU PRODUIT



GENERAL SPECIFICATIONS / SPECIFICATION GÉNÉRALES

Classification / Classification	Lithium-Ion
Designation IEC / Désignation IEC	18650
Nominal Capacity / Capacité Nominale	2500 mAh
Minimal Capacity / Capacité Minimale	2450 mAh
Nominal voltage / Tension Nominale	3.7V
Average weight (g) / Poids moyen (g)	47g
Shelf Life / Durée de vie	10 years / 10 ans
Dimensions / Dimension	65.3 x 18.5 mm
Recommended applications / Applications recommandées	Flashlights, electric cars, camera flash


TEMPERATURE RANGE / PLAGE DE TEMPÉRATURE

Storage temperature range / Température de stockage	15°C to 25°C
Operating temperature range / Température d'utilisation	0°C to 45°C
Number of Charging cycles / Nombre de cycles de charge	> 400

CONFIGURATION AVAILABLE / CONFIGURATION DISPONIBLE

Terminal available / Extrémité disponible	Button
Packaging available / Emballage disponible	Bulk / Blister Vrac / Blister
Pieces per carton / Contenu par carton	<b>UM18650BT25</b> 10 pieces / inner 100 pieces / master
	<b>UM18650BT25-B</b> 10 pieces / inner 100 pieces / master

NOMINAL DIMENSION (mm)

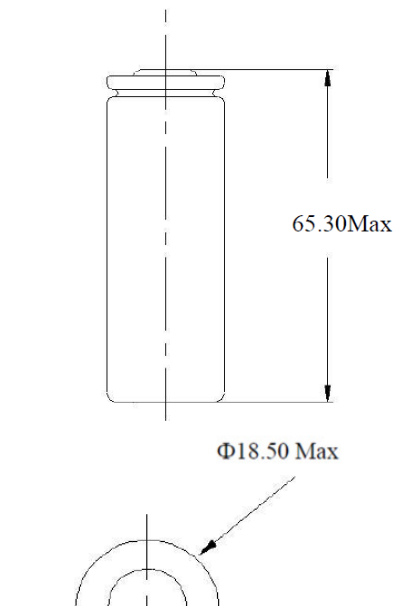

\*The above information is generally descriptive only and is not intended as guarantee or warranty  
\*\*Uniross reserves the right to alter or amend the design, model and specification without prior notice.