

PRODUCT IMAGE / IMAGE DU PRODUIT



GENERAL SPECIFICATIONS / SPECIFICATION GÉNÉRALES

Classification / Classification	Lithium-Ion
Designation IEC / Désignation IEC	16340 / RCR123A
Nominal Capacity / Capacité Nominale	650 mAh
Minimal Capacity / Capacité Minimale	650 mAh
Nominal voltage / Tension Nominale	3.6V
Average weight (g) / Poids moyen (g)	22g
Shelf Life / Durée de vie	10 years / 10 ans
Dimensions / Dimension	34 x 16.6 mm
Recommended applications / Applications recommandées	Flashlights, electric cars, camera flash


TEMPERATURE RANGE / PLAGE DE TEMPÉRATURE

Storage temperature range / Température de stockage	15°C to 25°C
Operating temperature range / Température d'utilisation	0°C to 45°C
Number of Charging cycles / Nombre de cycles de charge	> 400

CONFIGURATION AVAILABLE / CONFIGURATION DISPONIBLE

Terminal available / Extrémité disponible	Button
Packaging available / Emballage disponible	Bulk / Blister Vrac / Blister
Pieces per carton / Contenu par carton	UM16340N1 10 pieces / inner 100 pieces / master UM16340N1-B 100 pieces / inner 400 pieces / master

NOMINAL DIMENSION (mm)

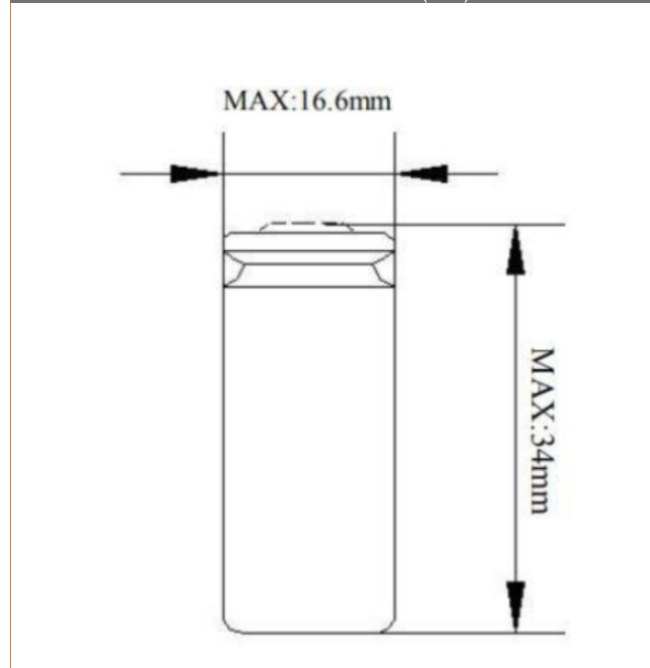

*The above information is generally descriptive only and is not intended as guarantee or warranty
**Uniross reserves the right to alter or amend the design, model and specification without prior notice.