

PRODUCT IMAGE / IMAGE DU PRODUIT




GENERAL SPECIFICATIONS / SPECIFICATION GÉNÉRALES

Classification / Classification	Nickel Metal Hydride
Battery Type / Type de Batteries	AA
Nominal voltage / Tension Nominale	1.2V
Nominal capacity / Capacité Nominale	2700mAh
Minimal capacity / Capacité Minimale	2500mAh
Weight / Poids	30.0g

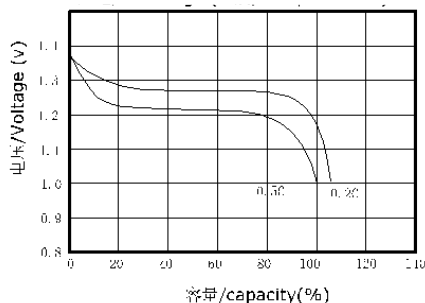
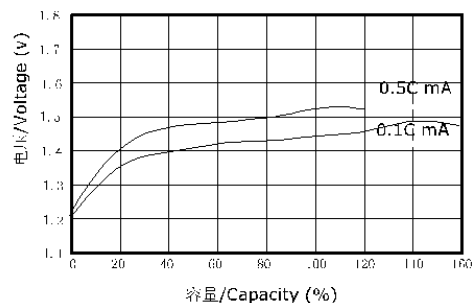
CHARGING INFORMATION / INFORMATION SUR LA CHARGE

Standard Charge Charge Standard	250mA×16h
Rapid Charge Charge Rapide	5-10mV
Internal Impedance Impédance Interne	< 35 mΩ after standard charge at 1 kHz for 1 hour
Cycle Life Cycle de Vie	>500
Max Continuous Discharge Current Courant Maximal de Charge	5000mA

DIMENSIONS



D	14.5 ⁺⁰ _{-0.7} mm
H	50.5 ⁺⁰ _{-1.5} mm
D ¹	5.4 ⁺⁰ _{-0.2} mm
H ¹	1.3 ^{+0.2} mm

 DISCHARGE CHARACTERISTICS
 CARACTERISTIQUES DE DECHARGE

 CHARGE CHARACTERISTICS
 CARACTERISTIQUES DE CHARGE


AMBIENT TEMPERATURE RANGE / PLAGE DE TEMPERATURE AMBIANTE

Operating temperature range for humidity: +65%± 20% Température d'utilisation avec une humidité de 65%± 20%	Standard charge / Charge Standard Floating charge / Charge Flottante Rapid charge / Charge Rapide Discharge / Décharge	0 to +45°C (32 to 113°F) 10 to +45°C (50 to 113°F) -10 to +45°C (14 to 113°F) -20 to +65°C (-4 to 149°F)
Storage temperature range for humidity: +65%±20% Température de stockage avec une humidité de 65%± 20%	Within 1 year / Première année Within 6 months / Premier 6 mois Within 1 month / Premier mois Within 1 week / Première semaine	-20 to +35°C (-4 to 95°F) -20 to +45°C (-4 to 113°F) -20 to +55°C (-4 to 131°F) -20 to +65°C (-4 to 149°F)
Discharge at low Temperature Décharge à basse température	> 210 min at 0°C±2°C with 0.2C mA, after stored at 0°C±2°C for 24 hours	
Self Discharge / Auto-décharge	> 85% from rated capacity at 0.2C mA, after stored for 6 months > 80% from rated capacity at 0.2C mA, after stored for 12 months	
Humidity for operation and storage Humidité pour utilisation et stockage	65%±20%	

*The above information is generally descriptive only and is not intended as guarantee or warranty

**Uniross reserves the right to alter or amend the design, model and specification without prior notice.