


PRODUCT IMAGE / IMAGE DU PRODUIT

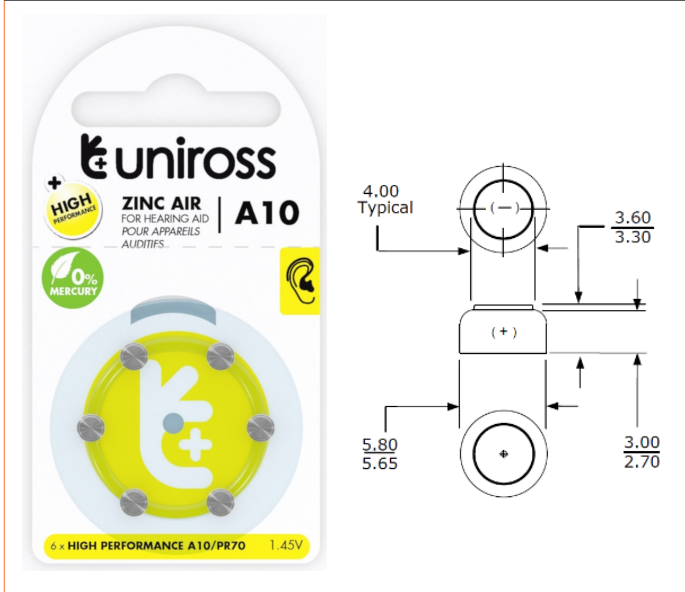

GENERAL SPECIFICATIONS / SPECIFICATION GÉNÉRALES

Technology / Technologie	Zinc Air (Zn/O ₂)
Designation IEC / Désignation IEC	PR70 / A10
Color / Couleur	Yellow / Jaune
Nominal voltage / Tension nominale	1.45V
Capacity Retention / Rétention de capacité	85% [after 3 years]
Available Current / Courant disponible	4mA [at 1.1v]
Average weight (g) / Poids moyen (g)	29
Battery Volume / Volume batterie	0.08 Cubic cm
Shelf Life / Durée de vie	3 years / 3 ans
Dimension (mm) / Dimension	Φ 5.80 x 3.60mm
100% Mercury Free / Sans Mercure	

CAPACITY/ CAPACITÉ [IEC 60086-2:2015]

Hearing Aid / Aide Auditive – Standard 1 mA continuous & 5 mA / 100 ms Pulses, EPV 1.05V	86mAh [86h]
Hearing aid high drain 1.5 mA continuous & 5 mA / 100 ms Pulses, EPV 1.1V	78mAh [52h]

TEMPERATURE RANGE / PLAGE DE TEMPÉRATURE

Operating temperature range / Température d'utilisation	-10°C to +50°C
Storage Temperature Range / Température de stockage	5°C to +30°C

RECOMMENDED APPLICATIONS / APPLICATIONS RECOMMANDÉES


Hearing Aid Instruments

Appareils auditifs


COMPLIANT WITH THE STANDARDS / CONFORME AUX NORMES

IEC 60086-1, IEC 60086-2
ANSI C18.1M Parts 1 & 2

Hearing Aid / Aide Auditive – Standard

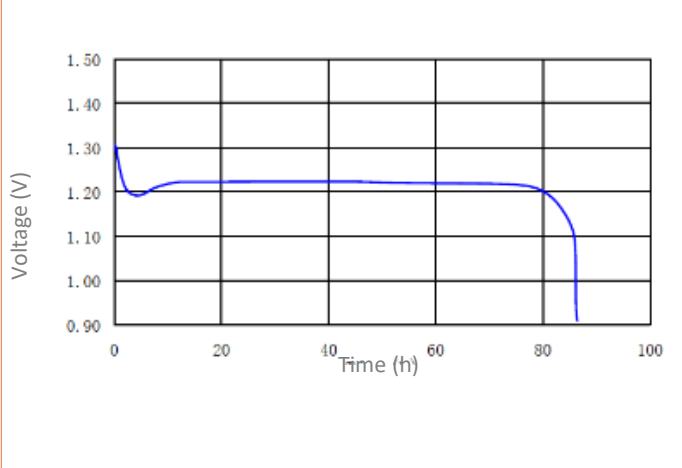

Hearing Aid / Aide Auditive – High Drain

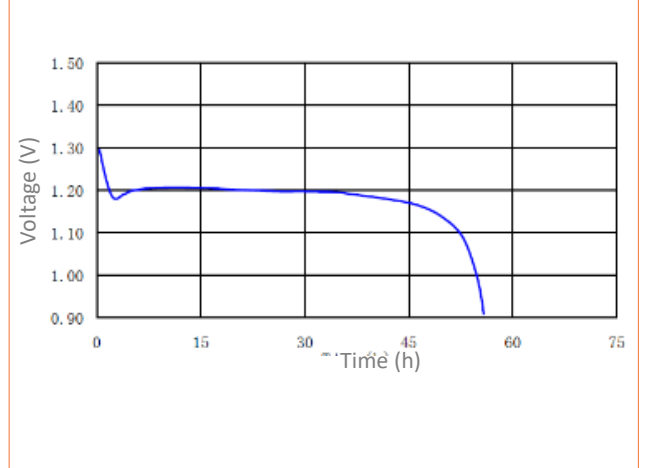

*The above information is generally descriptive only and is not intended as guarantee or warranty
**Uniross reserves the right to alter or amend the design, model and specification without prior notice.