




## Advantages

Our lithium-ion battery delivers best-in-class energy density (> 620 Wh/kg) among chemical batteries. It has an open-circuit voltage  $\geq 3.65$  V, with an operating voltage range of 3.3–3.6 V. Its wide operating temperature range (-55 °C – +85 °C) ensures it will deliver consistent, long-term (10+ years at room temperature) performance in a variety of usage scenarios, including IoT, Sensor, R&D Instrument, Automotive Telematics, Military Equipment, Utility Meters, Alarms and Security systems, Storage and tracking devices.

## General specifications

Technology / Technologie	Lithium Thionyl Chloride [Bobbin Type]
Designation IEC / Désignation IEC	UER14250
Nominal Capacity / Capacité Nominale	1.2 Ah [0.5 mA~2 V]
Nominal voltage / Tension nominale	3.6 V
Maximum continuous current	20 mA
Maximum pulse current	50 mA
Average weight / Poids moyen	11 g
Operating temperature range	-55 °C – +85 °C
End of Discharge Voltage / Tension de la fin de décharge	2 V
Shelf Life / Durée de vie	10 Years / 10 Ans
Dimensions	Φ D: 14.5x H 25.2 mm

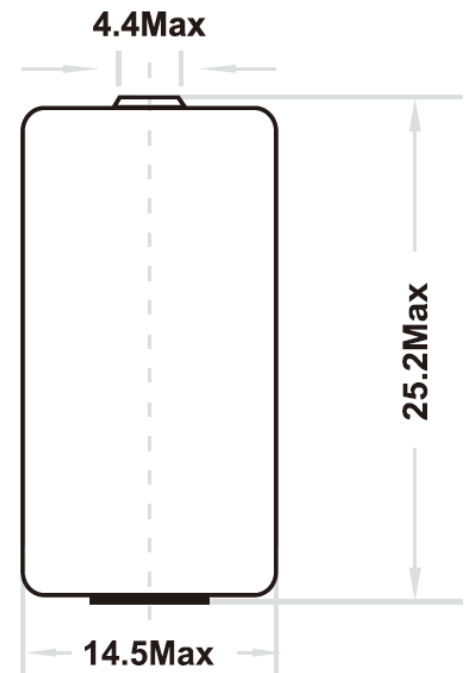

## Electrical Specifications

At  $23 \pm 2$  °C, the battery begins to discharge with a 5  $\mu$ A base current. The battery releases one pulse (50 mA/0.1s) every 2 minutes during discharge. The battery voltage should not be less than 2.7 V. The voltage value depends on the pulse characteristics, temperature, and usage of the battery.

### Available terminations

- S: Standard
- T: Solder tabs
- P: Axial pins

Customized terminations are also available.


### Safety considerations

Do not expose the battery to open flame or inflammable/ explosive materials.


Do not recharge, short circuit, disassemble, incinerate, or heat the battery  $>100$  °C.

Do not use the battery beyond its permitted temperature range.


Typical Discharge Profiles at  $+23 \pm 2$  °C

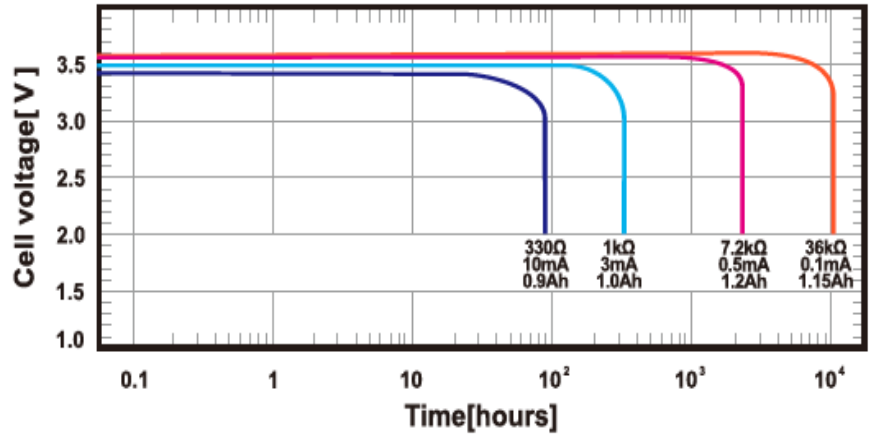

Restored Capacity vs. Current and Temperature [2.0 V cut-off]

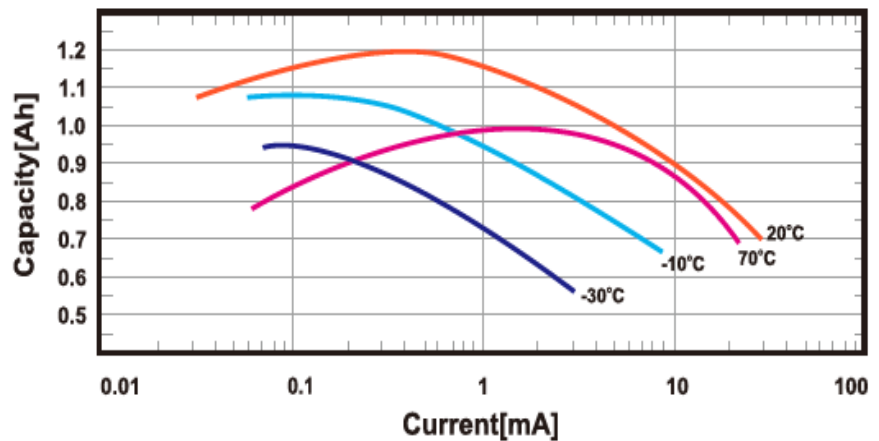

Voltage Plateau Curves Current and Temperature

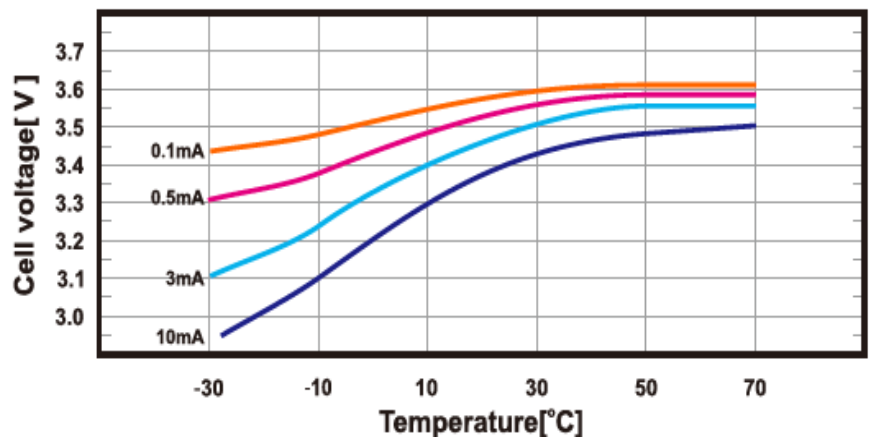

Note: The above information is generally descriptive only and is not intended as a guarantee or warranty. Uniross reserves the right to alter or amend the design, model and specification without prior notice.