




Advantages

Our lithium-ion battery delivers best-in-class energy density ($> 620 \text{ Wh/kg}$) among chemical batteries. It has an open-circuit voltage $\geq 3.65 \text{ V}$, with an operating voltage range of $3.3\text{--}3.6 \text{ V}$. Its wide operating temperature range ($-55 \text{ }^{\circ}\text{C} \text{ -- } +85 \text{ }^{\circ}\text{C}$) ensures it will deliver consistent, long-term (10+ years at room temperature) performance in a variety of usage scenarios, including IoT, sensors, R&D instruments, automotive telematics, military equipment, utility meters, alarms, and security systems, and storage and tracking devices.

General specifications

Technology / Technologie	Lithium Thionyl Chloride [Bobbin Type]
Designation IEC / Désignation IEC	UER14335
Nominal Capacity / Capacité Nominale	1.65 Ah [1.3 mA~2 V]
Nominal voltage / Tension nominale	3.6 V
Maximum continuous current	30 mA
Maximum pulse current	70 mA
Average weight / Poids moyen	13 g
Operating temperature range	$-55 \text{ }^{\circ}\text{C} \text{ -- } +85 \text{ }^{\circ}\text{C}$
End of Discharge Voltage / Tension de la fin de décharge	2 V
Shelf Life / Durée de vie	10 Years / 10 Ans
Dimensions	$\Phi D: 14.5 \times H: 33.5 \text{ mm}$

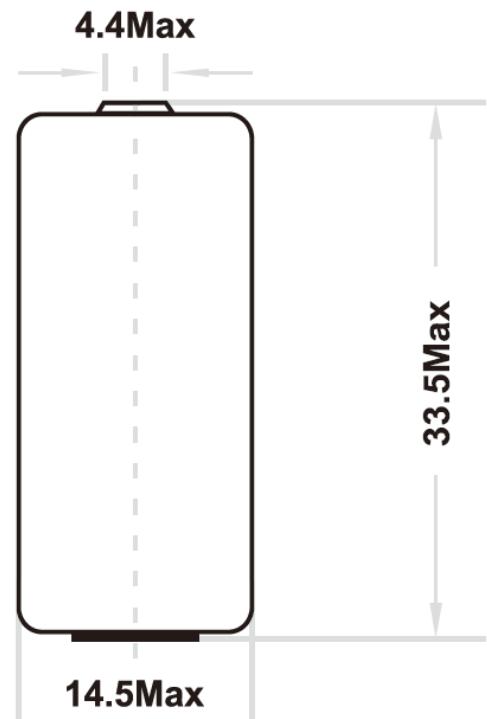

Electrical Specifications

At 23 ± 2 °C, the battery begins to discharge with a $10 \mu\text{A}$ base current. The battery releases one pulse ($70 \text{ mA}/0.1 \text{ s}$) every 2 minutes during discharge. The battery voltage should not be less than 2.7 V . The voltage value depends on the pulse characteristics, temperature, and usage of the battery.

Available terminations

S: Standard
T: Solder tabs
P: Axial pins

Customized terminations
are also available.


Safety considerations

Do not expose the battery to open flame or inflammable/explosive materials.


Do not recharge, short circuit, disassemble, incinerate, or heat the battery >100 °C.

Do not use the battery beyond its permitted temperature range.


Typical Discharge Profiles at $+23 \pm 2$ °C

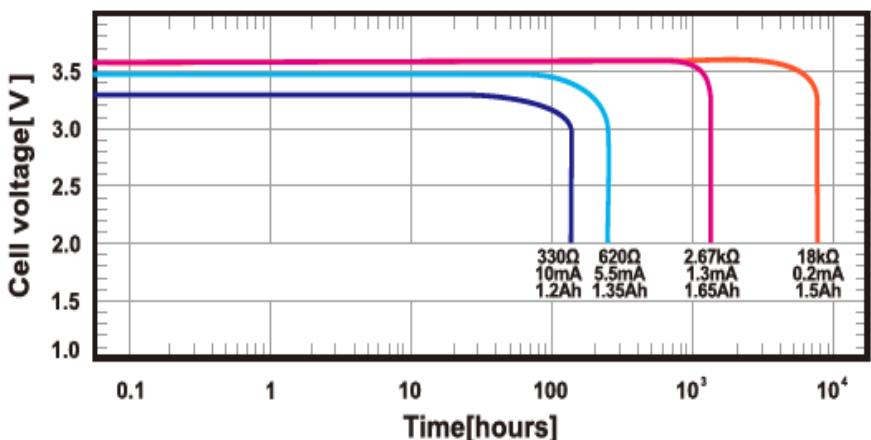

Restored Capacity vs. Current and Temperature [2.0 V cut-off]

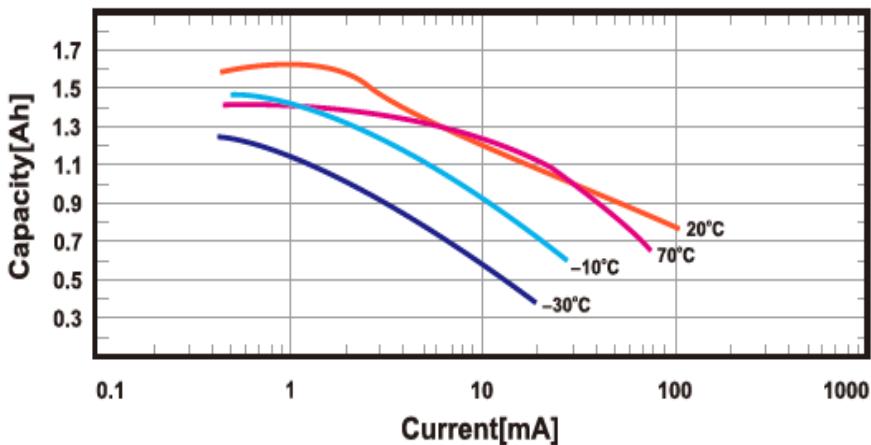

Voltage Plateau Curves Current and Temperature

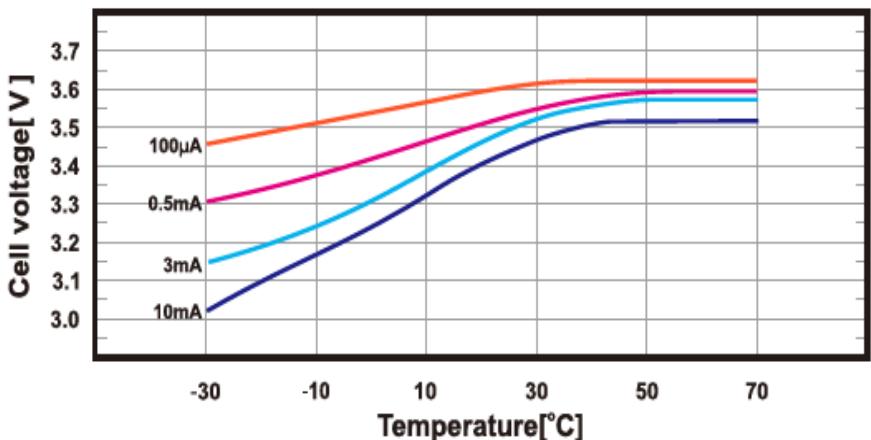

Note: The above information is generally descriptive only and is not intended as a guarantee or warranty. Uniross reserves the right to alter or amend the design, model and specification without prior notice.