


## 1867 Ni-MH 1.2V 4500mAh

Application :		<b>General Application</b>		Dimensions with Tube (mm) : 
Nominal Voltage :		1.2V		
		Discharge Rate		
		0.2C	1C	
Capacity	Minimum :	4500mAh	4050mAh	
	Typical :	4820mAh	4500mAh	
Weight :		≤ 62g		
Impedance at 1000Hz :		≤ 20mΩ		
Charge	Standard :	450mA (0.1C) during 16h		
	Fast :	4500mA (1C) during 1.2h		
Discharge Current	Standard :	900mA (0.2C)		
	Maximum :	13.5A (3C)		
Temperature	During Storage :	-20°C to +45°C		
	During Standard Charge :	0°C to +45°C		
	During Fast Charge :	+10°C to +40°C		
	During Discharge :	-20°C to +65°C		

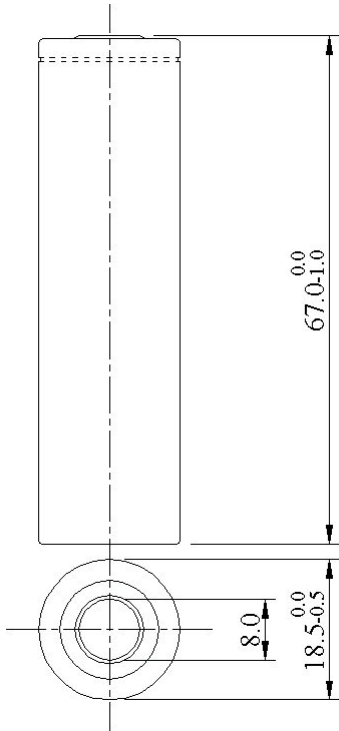